


Diesel Engines 12V/16V 2000 M70

for Vessels

with High Load Factors (1B)

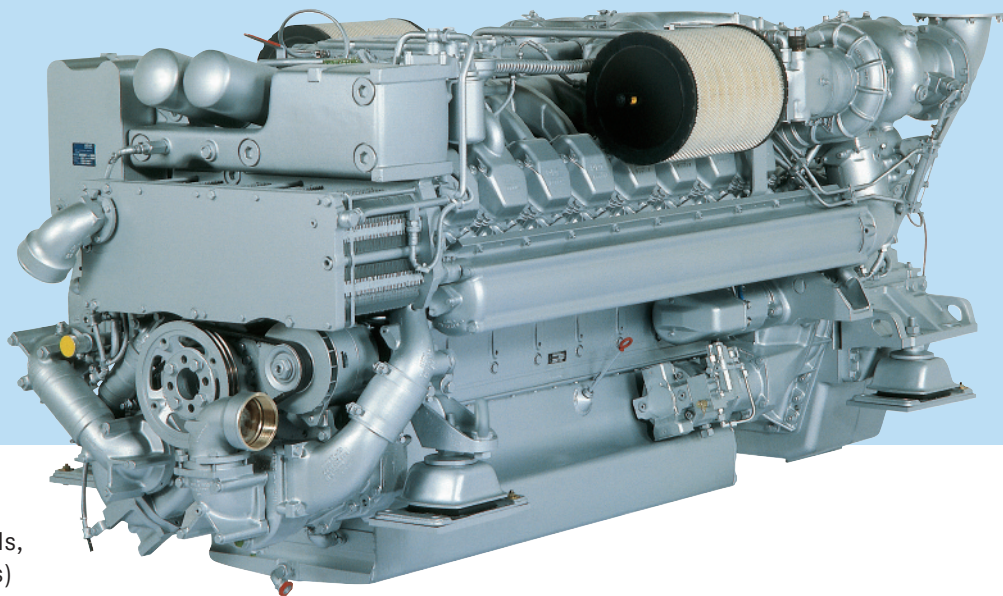

Typical applications:

Ferries (e. g. Monohulls, Hydrofoils, Catamarans, Surface Effect Ships) and Displacement Yachts

Engine Model		12V 2000 M70	16V 2000 M70
Rated power ICFN	kW (bhp)	788 (1055)	1050 (1410)
Speed	rpm	2100	2100
No. of cylinders		12	16
Bore/stroke	mm (in)	130/150 (5.1/5.9)	130/150 (5.1/5.9)
Displacement, total	l (cu in)	23.9 (1458)	31.8 (1943)
Flywheel housing		SAE 1	SAE 0
Gearbox model		ZF 2050 A i = 1.2 – 2.5	ZF 2550 i = 1.5 – 2.5

Performance and Fuel Consumption ¹⁾		12V 2000 M70			16V 2000 M70		
Speed	rpm	2100	1800	1200	2100	1800	1200
Maximum power	kW	788	750	385	1050	1000	475
	bhp	1057	1006	516	1408	1341	637
Power on propeller curve ²⁾	kW	788	500	145	1050	670	200
	bhp	1057	671	194	1408	898	268
Fuel consumption on propeller curve ²⁾	g/kWh	209	207	217	211	205	208
	l/h	198.4	124.7	38.0	267.0	165.5	50.1
	gal/h	52.4	33.0	10.0	70.5	43.7	13.2

¹⁾ Tolerance +5% per ISO 3046, Diesel fuel to DIN EN 590 with a min L.H.V. of 42800kJ/kg (18390 BTU/lb) ²⁾ 3.0 exponent



Standard Equipment

Starting System	Electric starter motor 24 V
Auxiliary PTO	Charging generator, 140A, 28V, 2 pole
Oil System	Gear driven lube oil pump, lube-oil duplex filter with diverter valve, lube-oil heat exchanger, handpump for oil extraction
Fuel System	Fuel feed pump, fuel hand pump, fuel pre-filter, fuel main filter with diverter valve, on-engine fuel oil cooler, individual HP injection pumps, jacketed HP fuel lines, injection nozzles (PLN system), flame proof hose lines, leak-off fuel tank level monitored
Cooling System	Coolant-to-raw water plate core heat exchanger, self priming centrifugal raw water pump, gear driven coolant circulation pump
Combustion Air System	Sequential turbocharging with 2 water-cooled exhaust-gas turbochargers, on-engine set of combustion-air filters
Exhaust System	Triple-walled, liquid-cooled, on-engine exhaust manifolds, 2 exhaust bellows vertical discharge
Mounting System	Resilient mounts at free end
Engine Management System	Engine and gearbox control and monitoring system (MDEC)

Optional Equipment

Auxiliary PTO	Bilgepump, on-engine PTOs
Oil System	Centrifugal oil filter, oil replenishment system
Fuel System	Duplex fuel pre-filter
Cooling System	Coolant preheating system, integr. seawater gearbox piping
Exhaust System	2 exhaust bellows horizontal discharge
Mounting System	Resilient mounts at driving end
Engine Management System	In compliance with Classification Society Regulations (EMU + GMU)
Monitoring / Control System	blueline, MCS-5, RCS-5
Power Transmission	Torsionally resilient coupling
Gearbox Options	Reverse reduction gearbox, el. actuated, gearbox mounts, trolling mode for dead-slow propulsion, free auxiliary PTO, hydraulic pump drives
Classification	ABS, BV, CCS, DNV, GL, KR, JG, LR, NK, RINA

Power definition according ISO 3046

Intake air temperature 25°C / Sea water temperature 25°C

Intake air depression 15 mbar / Exhaust back pressure 30 mbar

Barometric pressure 1000 mbar

Power reduction at 45°C/32°C: none

All engines fulfil IMO emission regulation, certificate on request

16V 2000 M70 available with EPA Tier 2 certificate.

Dimensions and Masses (incl. gearbox)



Engine Model		12V 2000 M70	16V 2000 M70
Length [L]	mm (in)	2600 (102.4)	3130 (123.2)
Width [W]	mm (in)	1890 (74.4)	1400 (44.5)
Height [H]	mm (in)	1290 (50.8)	1290 (50.8)
Mass [dry]	kg (lbs)	3480 (7672)	4520 (9965)

Specifications are subject to change without notice.

All dimensions are approximate. For complete information refer to installation drawing.

For further information consult your MTU or MTU Detroit Diesel distributor/dealer.

Dimensions and Masses



12V 2000

Tognum Group Companies

Europe / Middle East / Africa / Latin America

MTU Friedrichshafen GmbH
88040 Friedrichshafen
Germany
Phone +49 7541 90 7003
Fax +49 7541 90 7081
marineregion1@mtu-online.com
www.mtu-online.com

Asia / Australia / Pacific

MTU Asia Pte. Ltd.
1, Benoi Place
Singapore 629923, Republic of Singapore
Phone +65 6861 5922
Fax +65 6861 3615
marineregion2@mtu-online.com
www.mtu-online.com.sg

USA / Canada / Mexico

MTU Detroit Diesel, Inc.
13400 Outer Drive West
Detroit, Michigan 48239, USA
Phone +1 313 592 7806
Fax +1 313 592 5137
marineregion3@mtu-online.com
www.mtudetroitdiesel.com