

Courage®



15-20 HP

SV601

COOLING Air  
 CYLINDERS Single  
 SHAFT Vertical  
 WARRANTY 2-Yr Commercial

ENGINE TYPE  
 Four-cycle, gasoline, OHV, cast-iron cylinder bore, aluminum block  
 ADDITIONAL FEATURES  
 Twin-cam, dual-reciprocating balance system, Consistent-Cut  
 .. technology,  
 acoustically dampened air induction, leakproof crankcase, crossflow cylinder head

MODEL		SV471	SV530	SV541	SV591	SV601
GROSS POWER @ 3600 RPM	MAX. HP (KW)	15 (11.2)	17 (12.7)	18 (13.4)	19 (14.2)	20 (14.9)
DISPLACEMENT	CU IN (CC)	36.0 (597)				
BORE	IN (MM)	3.7 (94)				
STROKE	IN (MM)	3.4 (86)				
PEAK TORQUE @ RPM	CV FT-LB (NM)	29.7 (40.3) @ 2600 rpm	30.0 (40.7) @ 2600 rpm	30.2 (40.9) @ 2600 rpm	30.4 (41.2) @ 2800 rpm	30.6 (41.5) @ 3000 rpm
COMPRESSION RATIO		8.5:1				
DRY WEIGHT	LB (KG)	79 (35.8)				
OIL CAPACITY	U.S. QT (L)	1.6 (1.5)				
LUBRICATION		Pressure lubrication with full-flow filter				
DIMENSIONS* L x W x H	IN (MM)	19.4 x 16.4 x 12.9 (493 x 417 x 328)				

RATED PER SAE J1940 GROSS


\*Length is front of valve cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.



# Courage®


SV471, SV530, SV541, SV591, SV601

MAXIMUM POWER

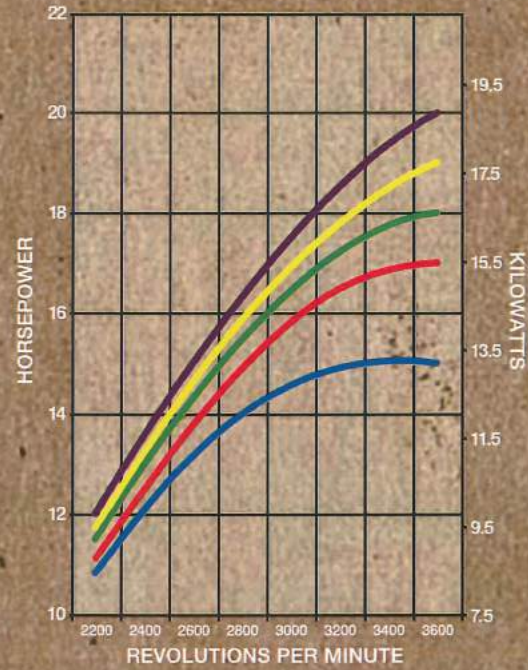

■ SV471 ■ SV530 ■ SV541  
■ SV591 ■ SV601

MAXIMUM TORQUE

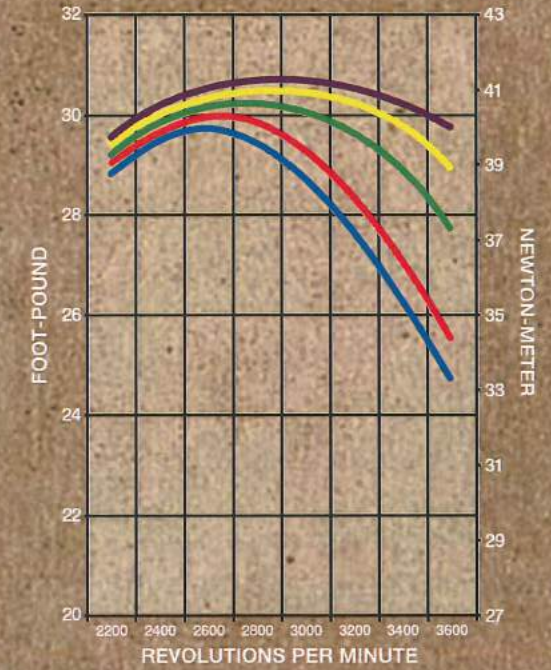

■ SV471 ■ SV530 ■ SV541  
■ SV591 ■ SV601