



STANDARD FEATURES

ENGINE:

Tier 3 / Stage IIIA:- Caterpillar C18 ACERT 630hp (470kW)

CONE CHAMBER:

Terex MVP450X

Range of liner configurations available, 18%, max feed size dependent on liner configuration and wear*

Direct cone drive via wet clutch

HOPPER/FEEDER:

Hopper Capacity: 8m³ (10.4yd³)

Belt width: 1.2m (48")

Wear resistant liner plates

MAIN CONVEYOR:

Belt width: 1.2m (48")

High spec scraper at head drum

Wear resistant liners at crusher discharge point

Dust Covers

GENERAL:

Galvanised catwalk c/w handrail, kick board and access ladders

Heavy duty track unit, sprocket centres 3.8m, pad width 500mm

Hand held track control set with connection lead

Two speed tracking

Safety guards in compliance to machinery directive

One auxiliary drive

Emergency stops

Piped for dust suppression c/w spraybars

OPTIONAL EQUIPMENT

Hydraulically driven water pump

Electric re-fuelling pump

Hydraulic extensions for feed hopper (capacity 10m³/13yd³)

Radio remote system

Belt weigher for main conveyer

Stockpile sensor for main conveyer

Lighting mast

Second auxiliary drive

Hot climate lubrication kit (For above +30°C ambient)

Hot climate cooler pack c/w hot climate lubrication kit (For above +40°C ambient)

Cold climate lubrication kit (for below -10°C ambient)

Camera over crusher

Control panel positive air pressurization


Radiator blast guard

Special paint colour (if different from Terex White Colour RAL 1013 or Finlay Orange RAL 2002) . RAL must be specified on order*

Transport dimensions




Working dimensions

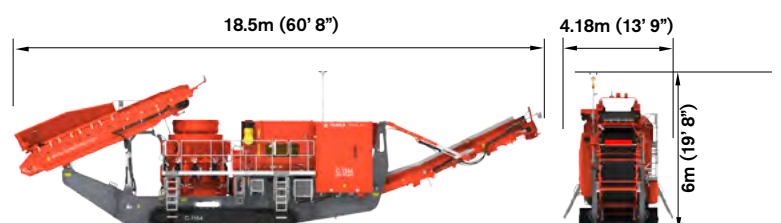

Machine Weight:

61,000kg (134,482lbs) (with hopper extensions)

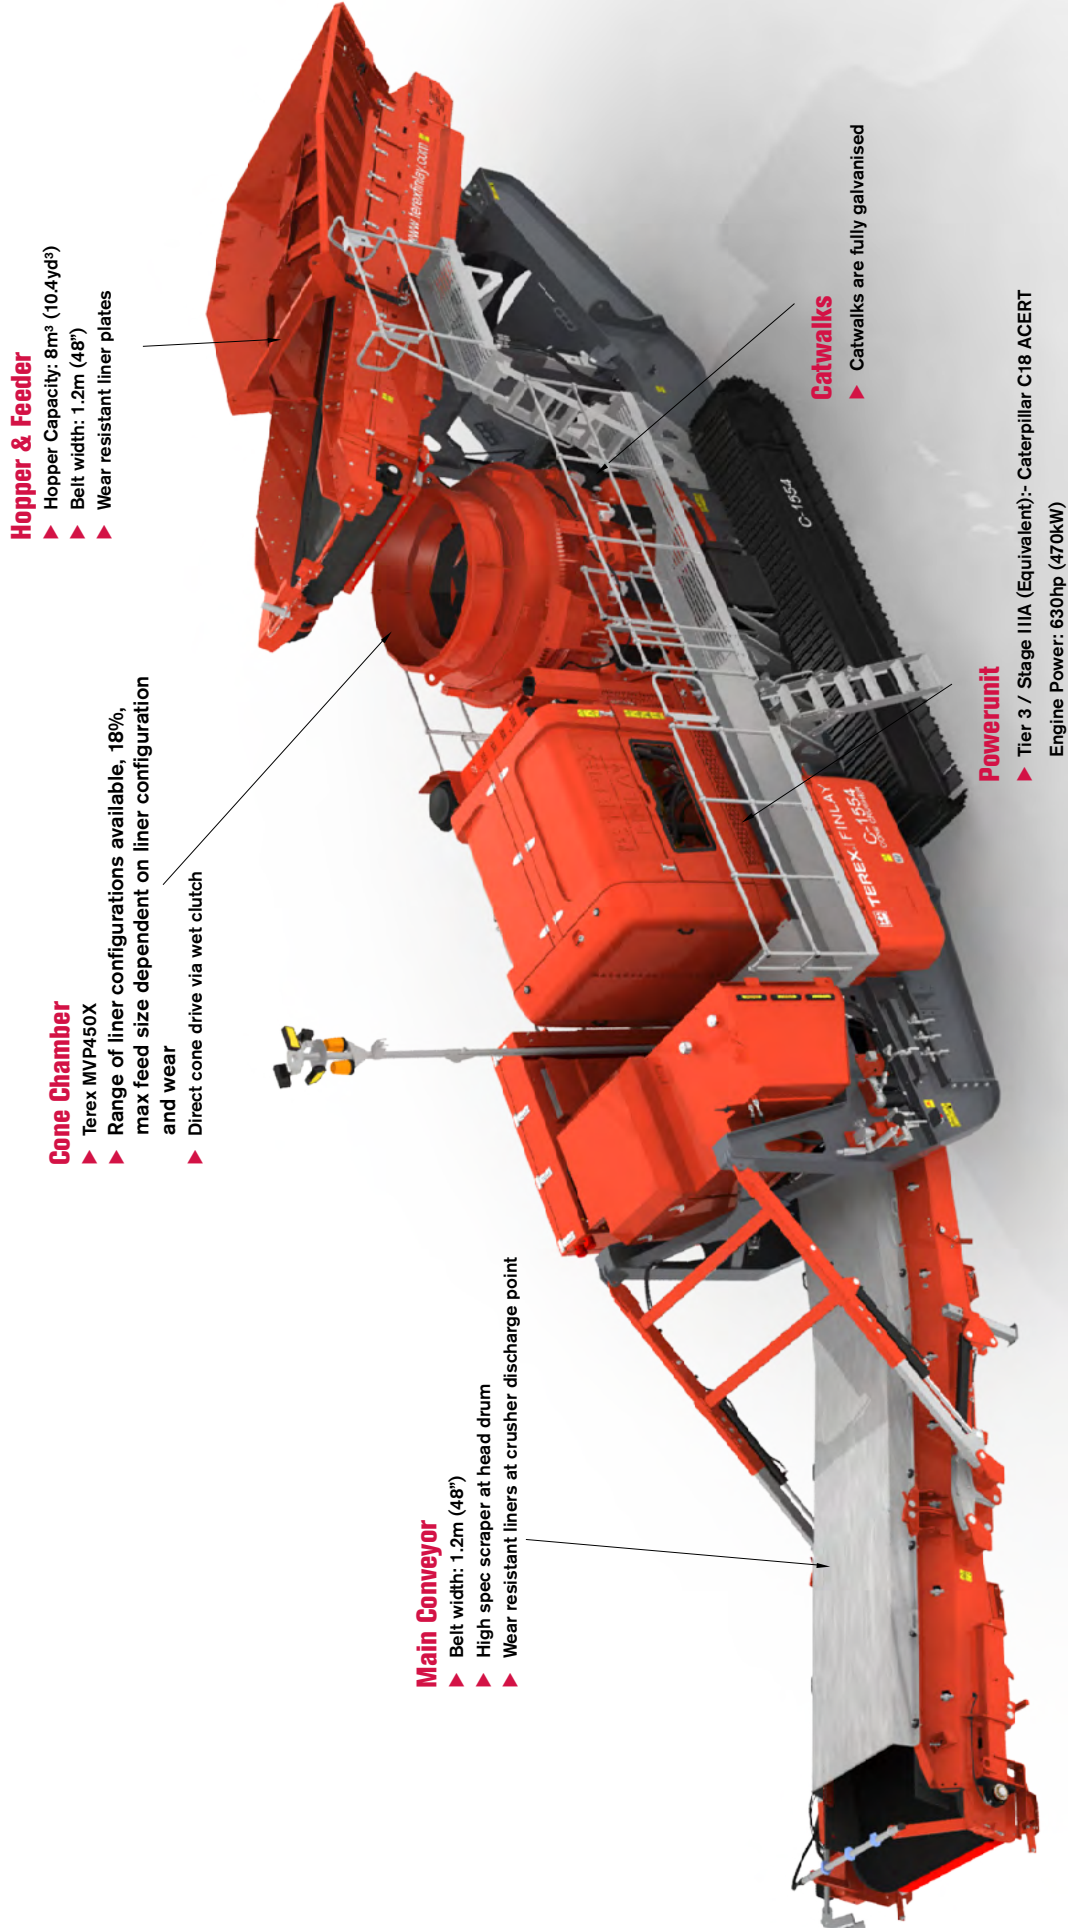

Cone Chamber

- ▶ Terex MVP450X
- ▶ Range of liner configurations available, 18%, max feed size dependent on liner configuration and wear
- ▶ Direct cone drive via wet clutch

Hopper & Feeder

- ▶ Hopper Capacity: 8m³ (10.4yd³)
- ▶ Belt width: 1.2m (48")
- ▶ Wear resistant liner plates

Main Conveyor

- ▶ Belt width: 1.2m (48")
- ▶ High spec scraper at head drum
- ▶ Wear resistant liners at crusher discharge point

Catwalks

- ▶ Catwalks are fully galvanised

Powerunit

- ▶ Tier 3 / Stage IIIA (Equivalent):- Caterpillar C18 ACERT
Engine Power: 630hp (470kW)